


DITCH LIGHT MOUNT

2025-UP/TOYOTA 4RUNNER

AC7107701NA

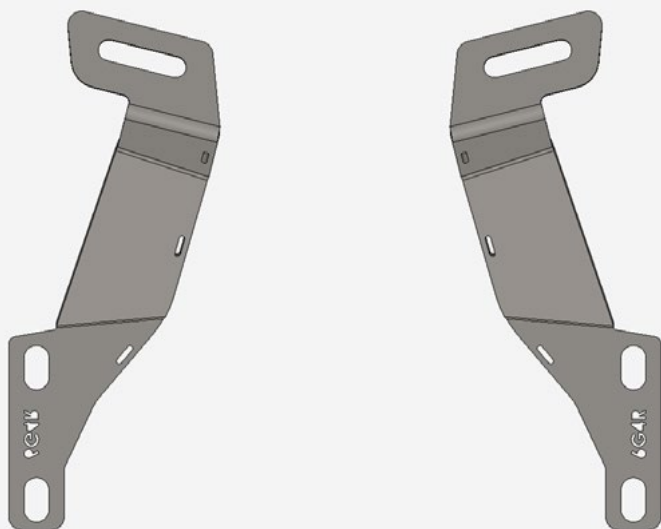

TOOLS REQUIRED

- 12mm Sockets
- 12mm Wrenches
- Marker
- Razor Blade/Dyke



SKILL LEVEL

- Easy



TIME REQUIRED

- Approximately 10 Minutes

⚠ WARNINGS/CAUTIONS BEFORE STARTING INSTALLATION ⚠

-BEFORE YOU INSTALL THIS KIT-

Read and understand all instructions, warnings, cautions, & notes contained in this installation instruction guide. Consult your vehicle owner's manual for proper disconnection of electrical and lifting of vehicle if required for installation of this product.

This install may require some technical skills and knowledge of basic mechanical work. If you do not feel that you are capable of performing this install please take this product to a trained professional.

After reading this guide please contact us with any questions or concerns before installing product.

Customer Service: 830-896-7571

Rago Fabrication is **not** responsible for any bodily injury or harm to you or your vehicle as a result of an improper install.

Proper installation of this kit required knowledge of the factory recommended procedures for removal and installation of original equipment components.

We recommend that the factory shop manual and any special tools needed to service your vehicle be on hand during the installation. Installation of this kit without proper knowledge of the factory recommended procedures may affect the

performance of these components and the safety of the vehicle.


Inspect all contents of this package to make sure product is not damaged and all installation hardware has been included. If parts are missing from kit, please be prepared to provide the following information:

1. Name of purchase location
2. Bar Code on side of box
3. Date above bar code
4. Date inside box cover

***ALWAYS WEAR EYE PROTECTION
WHEN OPERATING POWER TOOLS***


□ STEP 1

Using a marker, mark the mounting bracket outline to the hood for a reference line when finishing the install.

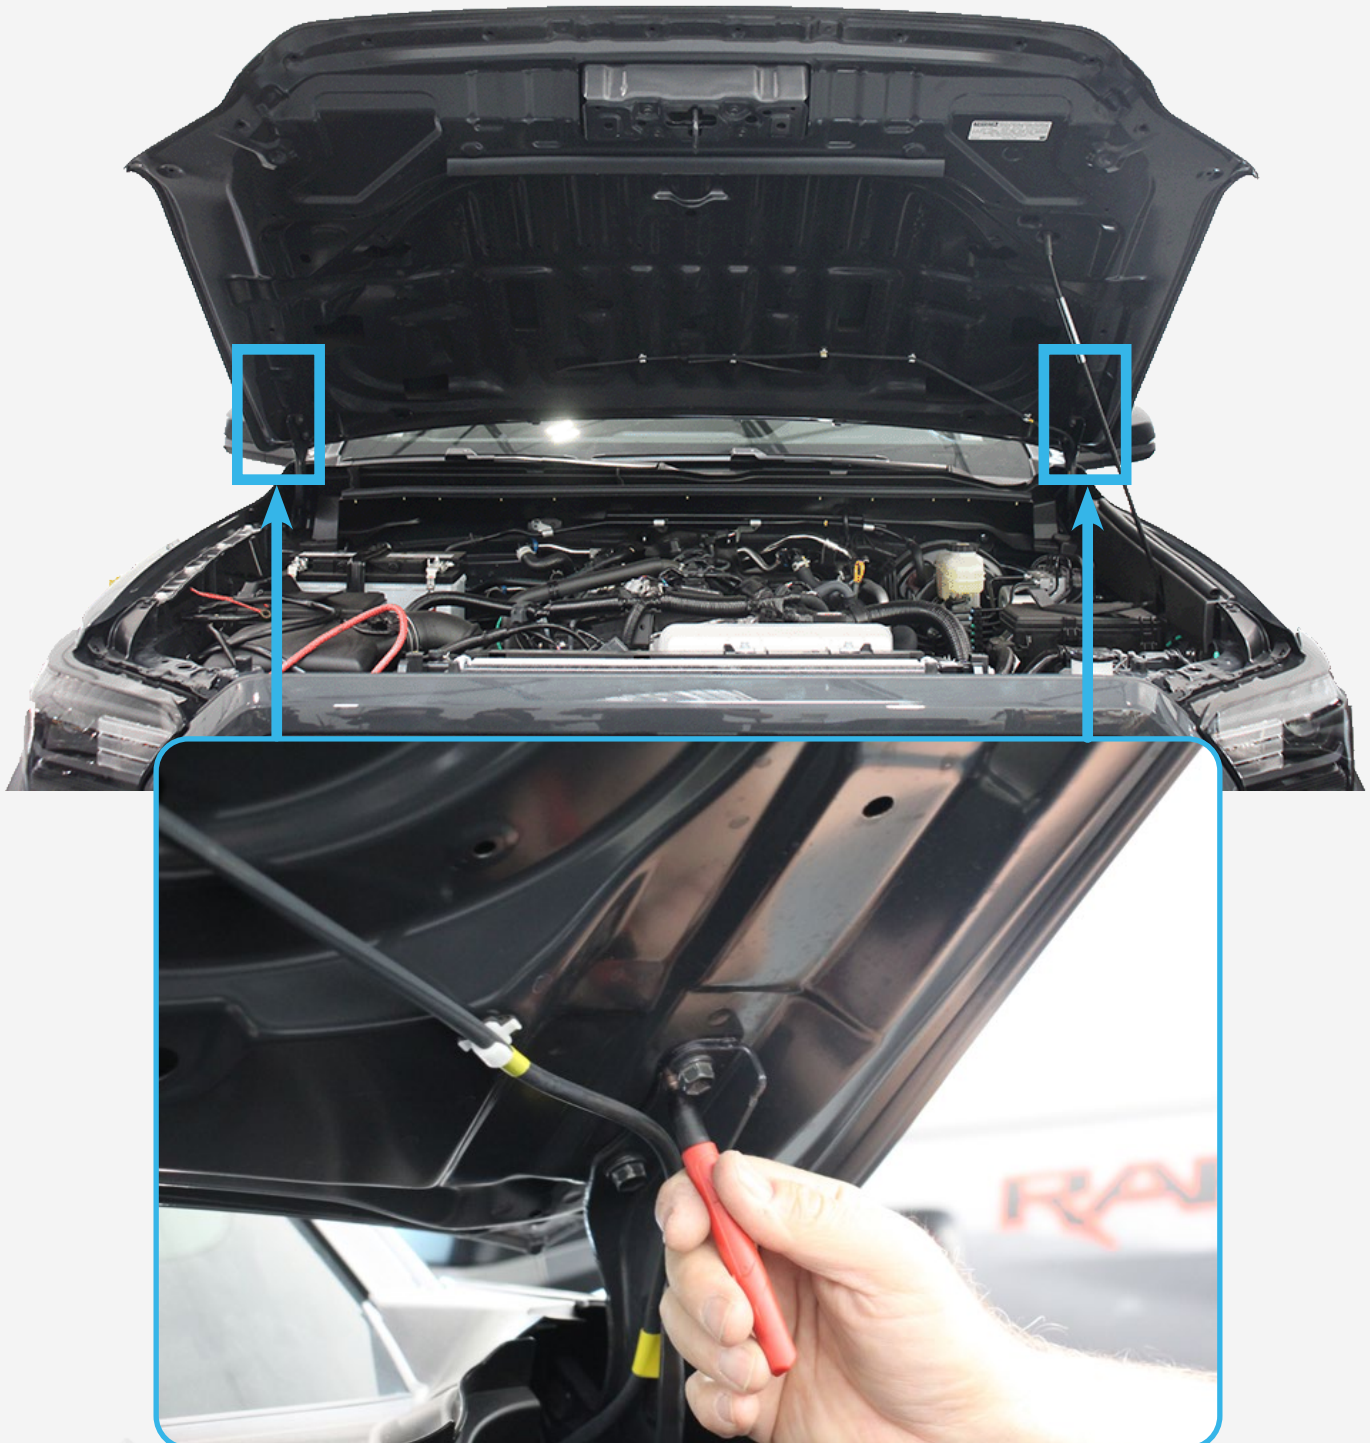

□ STEP 2


Using a (12mm socket), Remove the top mounting bolt. **DO NOT** remove from both sides, Install **one side at a time.**

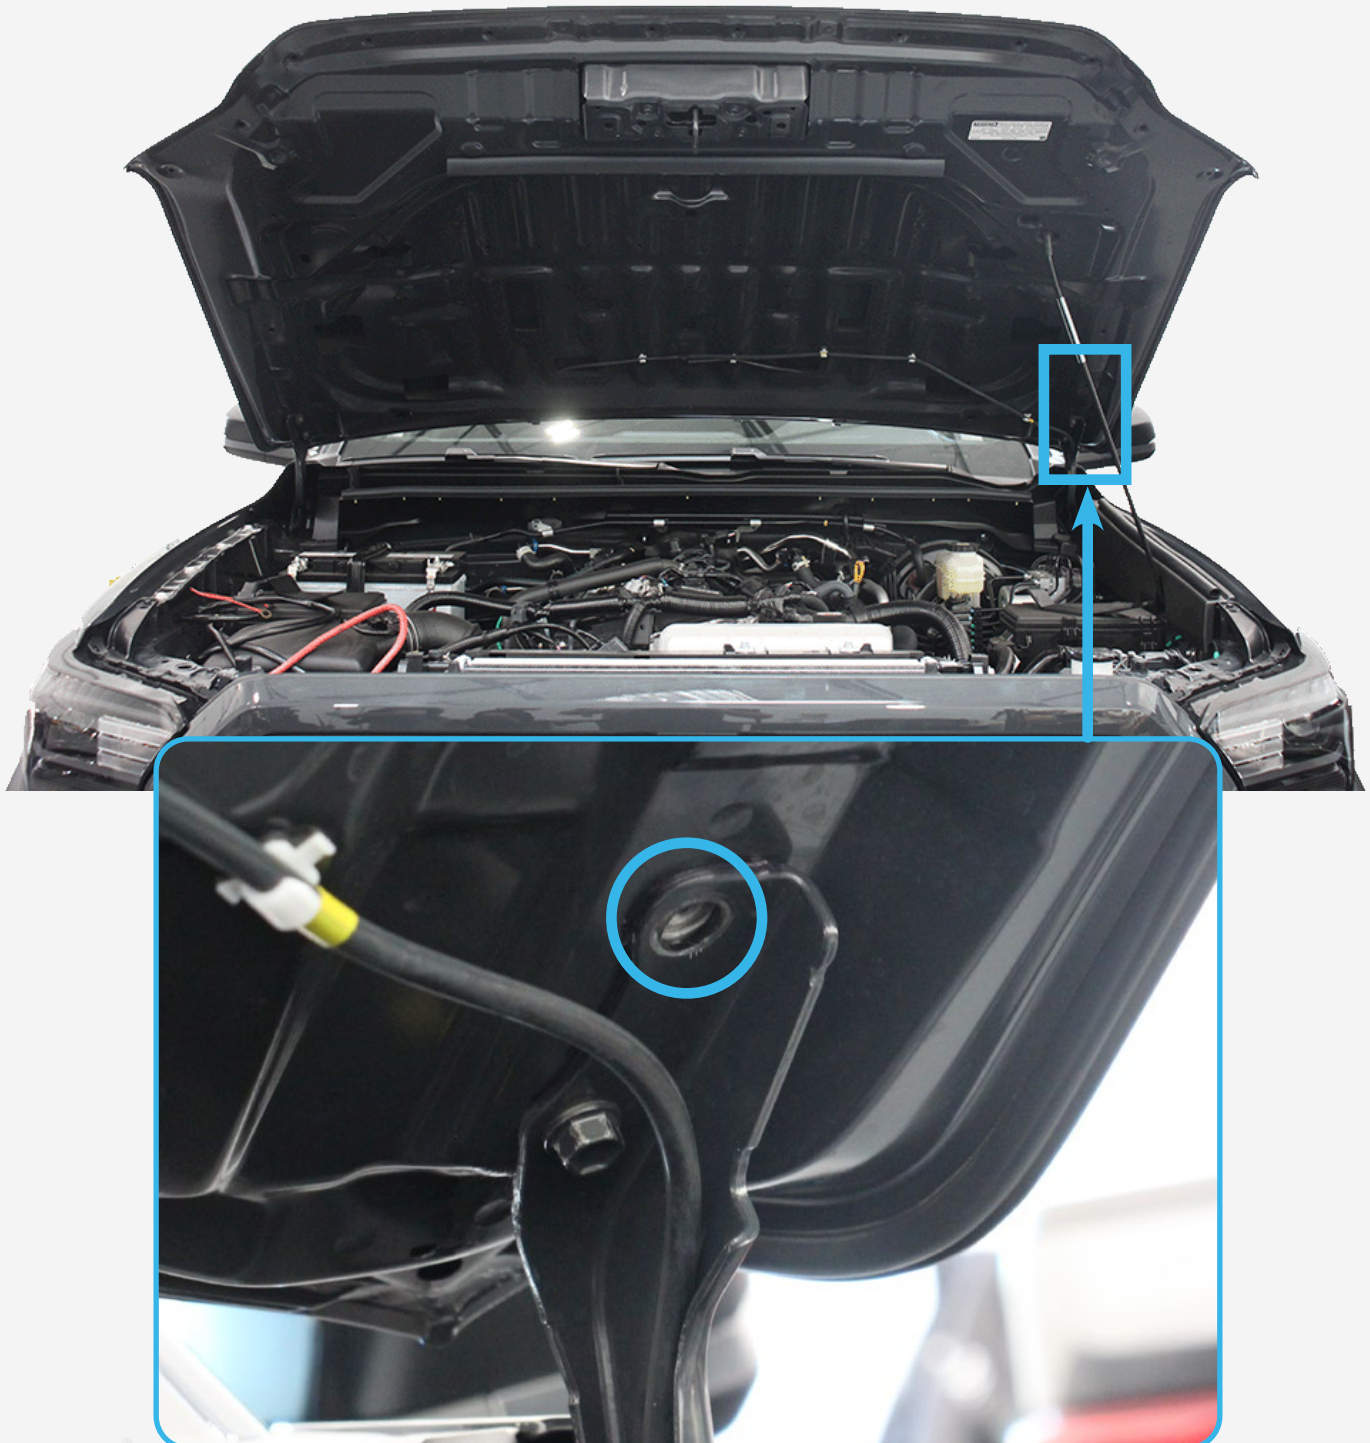


□ STEP 3

Install the bracket using the same top bolt removed from **step 2**. (Do not fully tighten for making adjustments).

Passenger

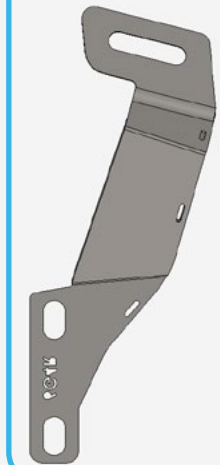

Driver

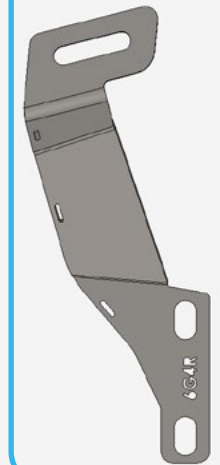

STEP 4

Remove the bottom mounting bolt and Slide the bracket over the bottom hole and install the bottom bolt again.




□ STEP 5

Ensure that the hood is aligned with the marks you made on **step 1**. Tighten with a (12mm socket) and repeat **steps 2-5** on the other side.



□ STEP 6

(Optional) With a helping hand, Slowly close the hood until the passenger ditch light mount touches the plastic as shown below. Mark the plastic and trim as needed using a (razor blade), a pair of (dykes), or your choice of cutting tools.

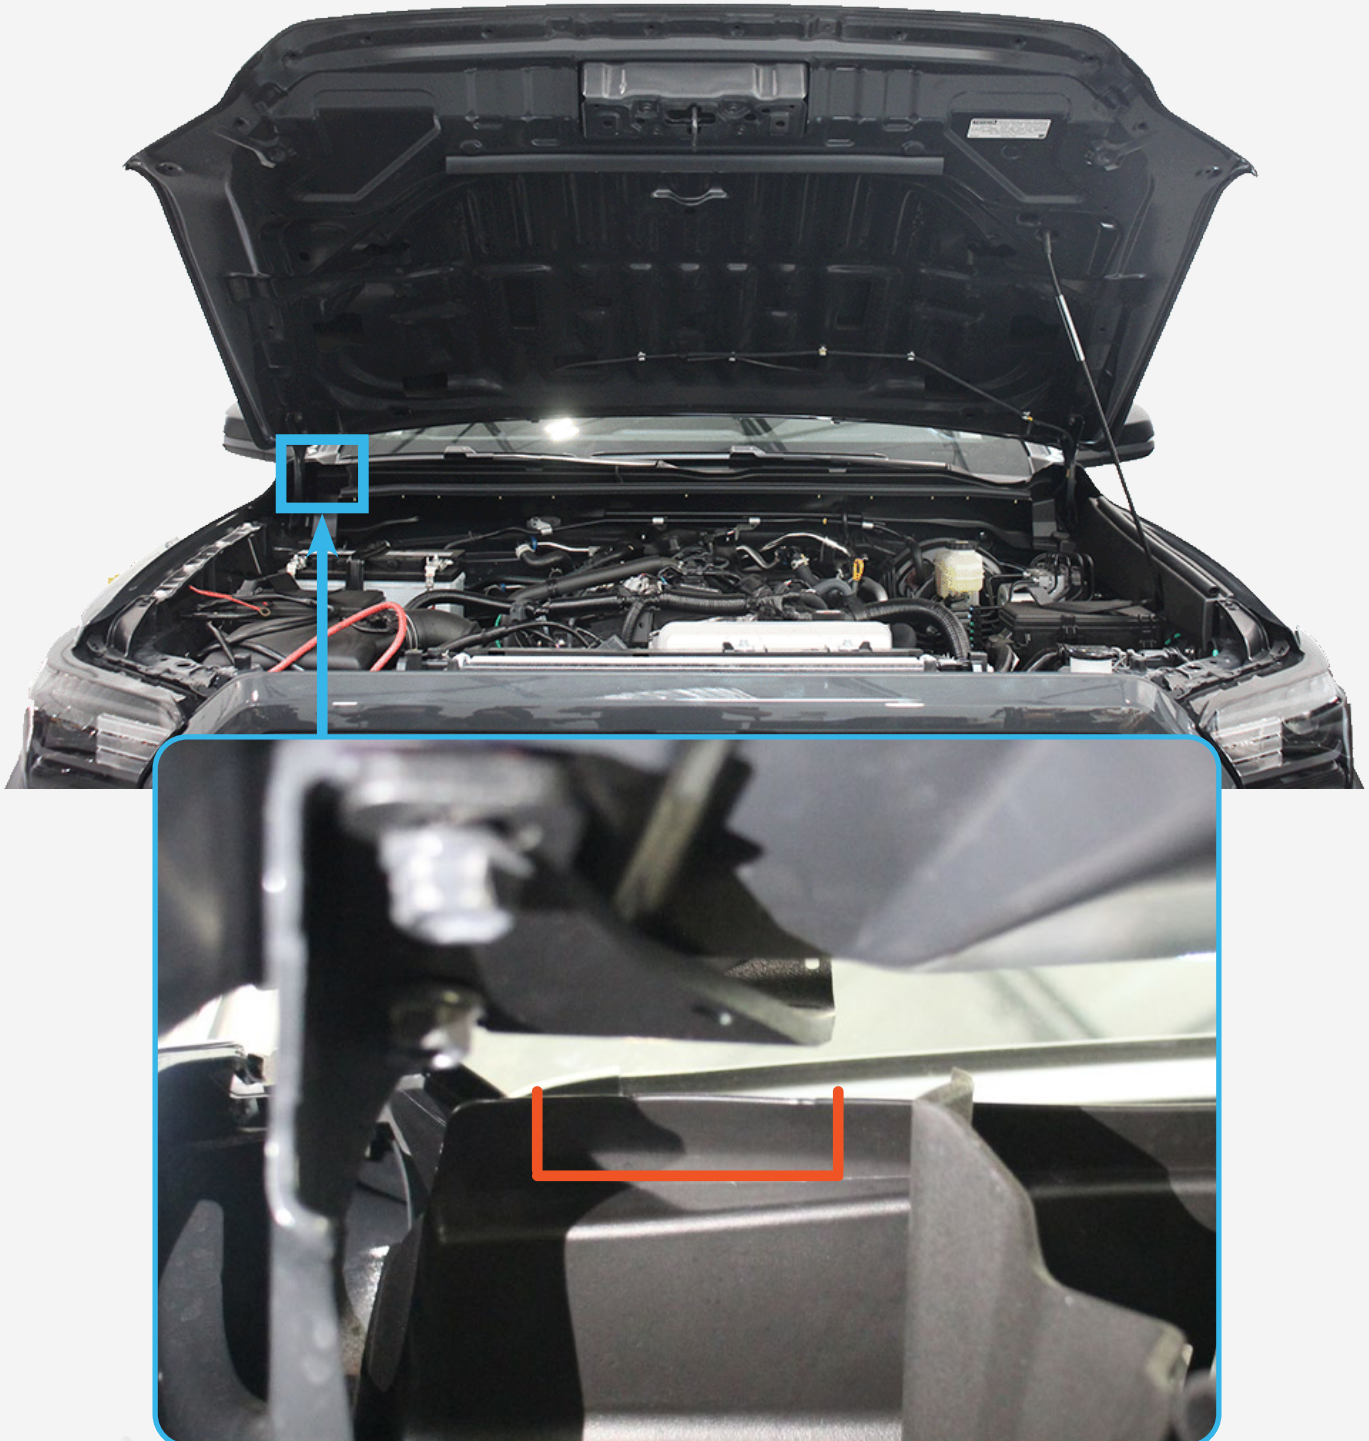

☐ STEP 7

Stand back and enjoy your new RAGO Ditch Light Mount.

Check and re-tighten all mounting bolts after 100 miles and periodically thereafter.

